

Flatwork ironers, IB3 2310/2314



Model IB3 2314

- SPACE SAVING – RETURN FEED SYSTEM
- FINGER GUARD PROTECTION
- ADJUSTABLE TEMPERATURE SETTING
- STEEL WOOL ROLLER COVER
- ERGONOMIC CONTROL PEDAL
- EASY TO OPERATE AND MAINTAIN

These heated flatwork ironers are efficient and convenient machines which add the finishing touch to the laundry. They are designed for standing up to heavy-use. Both models are equipped with foot pedal control, which leaves hands free to take care of the laundry. The foot pedal has 3 operating positions: ironing, pressing and reversing. A manual tray release device separates the tray from the cylinder and makes possible to remove any garment in the machine in the event of power failure.

Return feed system is standard on both models, which means, that they can be placed by a wall, saving valuable place.

Feature include an adjustable safety thermostat, finger guard protection extended to the full width of the roller as well as easy access to machinery for maintenance purposes.

Type IB3 2314 is supplied with an exhaust. For further specifications, please see overleaf.

LOIPART AB



P.O. Box 694
SE 441 18 Alingsås, Sweden
Phone +46 322 66 83 60
Telefax +46 322 63 77 47
E-mail loipart@loipart.se

19-136

DOC.NO. 19-136L
EDITION 2 04.04

FLATWORK IRONERS, IB3 2310, IB3 2314

Scale 1:20
Dimensions mm

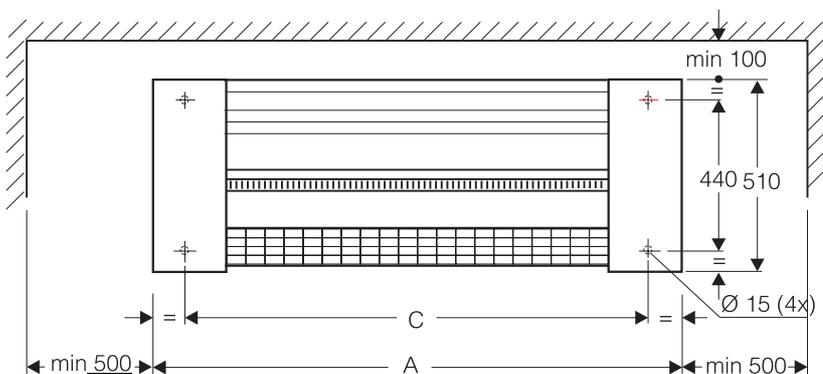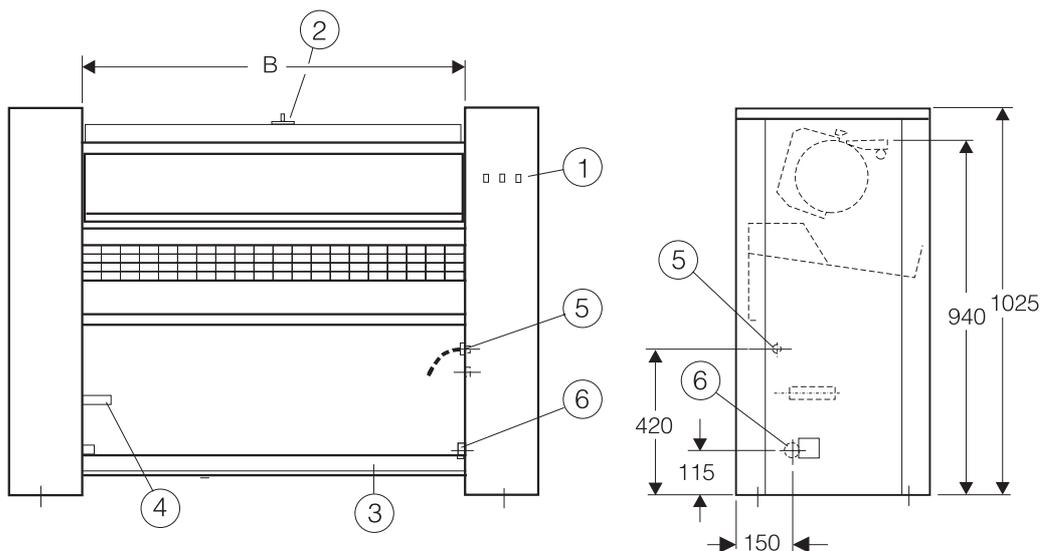

1. Control panel
2. Temperatur selection knob
3. Control pedal
4. Tray release device lever
5. Electrical connection
6. Exhaust Ø 40 mm
(model IB3 2314 only)

Dimensions

Type	A	B	C
IB3 2310	1395	1000	1221
IB3 2314	1795	1400	1621

Specification

Type	Max water evaporation capacity l/h	Exhaust		Ironing speed m/min	Voltage V	Loading kW		Fuse A	Weight kgs		Shipping volume m ³
		outlet Ø mm	capacity m ³ /h			heating	total		net	gross	
IB3 2310	5	-	-	3.4	400 3-50	5.0	5.2	10	120	145	0.910
IB3 2314	6.8	40	100		440 3-60	7.2	7.5		16	140	

INSTALLATION

General

Install the flatwork ironer acc. to installation instructions.

Relieve the black rubber from adjusting blocks and weld the remaining screw to deck. There is possible to fix the machine to the foundation using the holes made to block the machine to the transport pallet.

Electrical

Connect the machine via multipolar switch (not delivered by Electrolux) near the machine.